

1

CONNECT POWER

Disconnect Battery Negative (-) Cable Prior to Installing Amplifier

StreetWires Firewall Bushing




StreetWires Capacitor

Ground To Metal of Vehicle

Connect to Source Unit Remote Turn-on /Power Antenna Wire
(Do not use with Smart-Engage RCA to Line Level Adapters)

Remove Paint From Metal

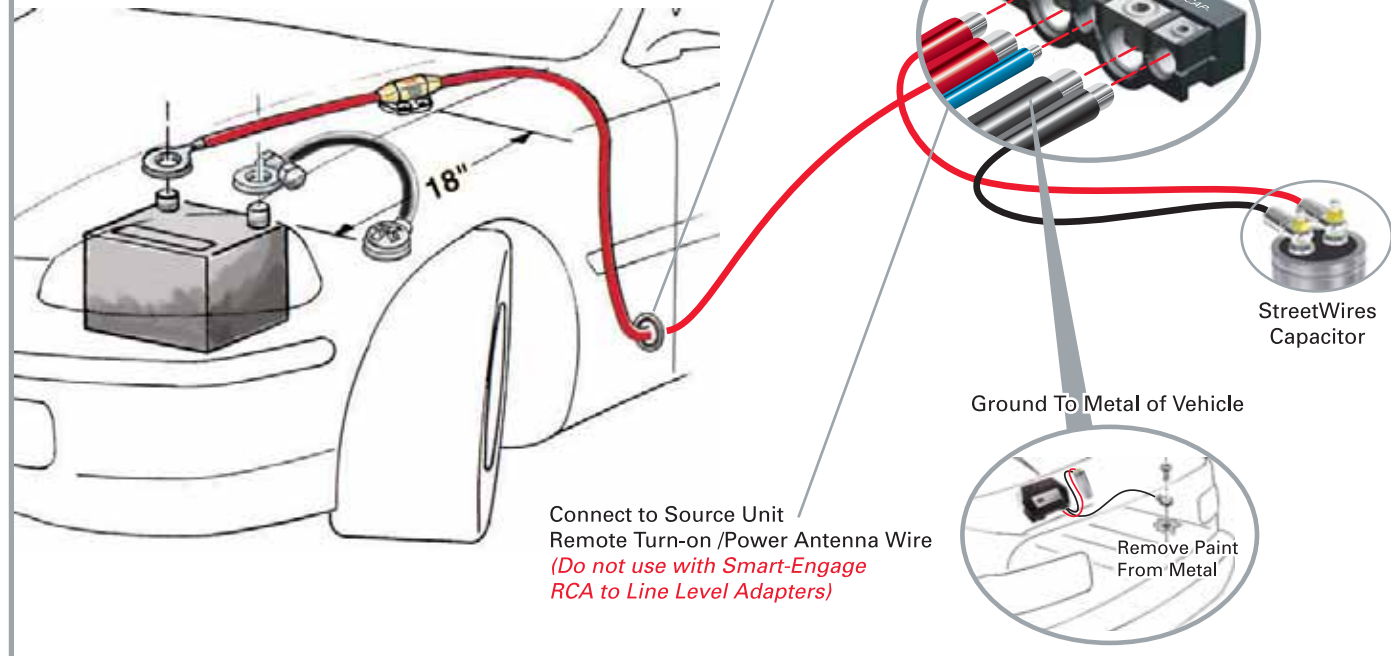


2


CONNECT SIGNAL

Remote Turn-on /Power Antenna Wire
(Do not use with Smart-Engage RCA to Line Level Adapters)

CONNECT EBC (EXTERNAL BASS CONTROL)

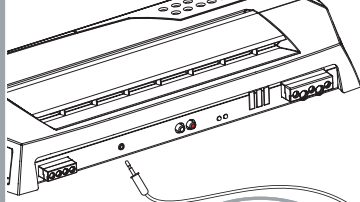

Mount EBC on the dashboard or within reach

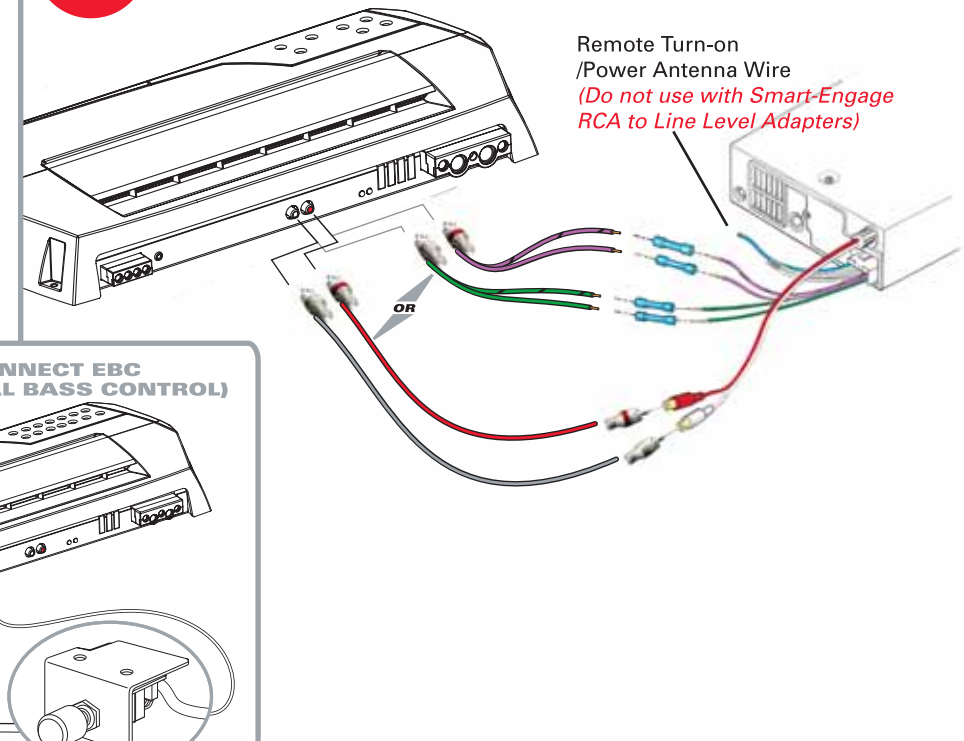

3

CONNECT SPEAKERS

12-8 AWG

≥1ohm

≥1ohm

12-8 AWG

≥2ohm

OR

12-8 AWG

≥1ohm

≥1ohm

12-8 AWG

≥2ohm

